



SMOOTH WALL

Smooth Wall duct has smooth outside/inside surface, made from virgin, flexible HDPE in 2 layer construction with inner wall co-extruded with 'Silicore®' lining. It offers lowest friction while installing Optic Fiber and copper cable networks. It can easily be swept to make gradual bends without special forming equipment. It has Superior resistance to natural or mechanical damage and has an expected life span of > 50 years.

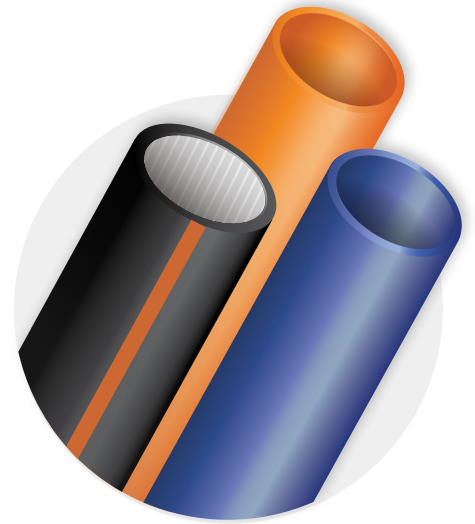

SMOOTH OUT RIBBED IN

Inside Straight Ribbed Silicore® Permanently Lubricated Lining, reduces surface area of contact between Duct and Cable and maximizes pulling and jetting distances. The ribs help direct airflow around the cable during cable jetting installations increasing jetting efficiency.

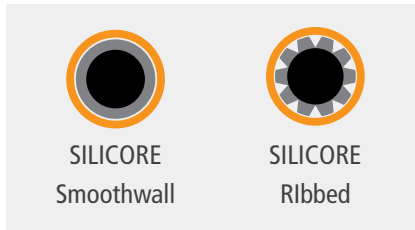

INSTALLATION APPLICATION	Existing Conduit • Plow • Direct Burial • Aerial		
MARKET APPLICATION	Telecom	Enterprise	Internet of Things Fiber to Home
OPTIONS	Sizes available from 20 mm OD to 110 mm OD		Smooth or Ribbed interior
COLORS			
FOOTAGE MARKINGS	Sequential foot or meter markings. Custom print streams available.		
SILICORE	SILICORE is co-extruded with the tough HDPE jacket creating a super slick permanent lining. SILICORE lined ducts allow for higher speed cable jetting and longer cable pulls.		
PREINSTALLED TAPE	Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™ ensures extra slack at any access point throughout the reel. Available 500 lb - 6,000 lb tensile strength or locatable		
PREINSTALLED CABLE	Specify single or multiple cables to be factory pre-installed. Cable types: Service Drops, Fiber, Coaxial, 600 Volt AI, 600 Volt Cu, Medium Voltage		